

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	---------------------------------	-----	------------

Content

- 1. APPLICATION
- 2. TECHNICAL DATA
- 3. FUNCTIONAL TEST
 - 3.1 Burner tests
- 4. MECHANICAL TEST
 - 4.1 Vibration Test
 - 4.2 Thread Torque Test
 - 4.3 Wire Pull Test
 - 4.4 Leakage Test-Element and Seal sensor
- 5. ENVIRONMENTAL TEST
 - 5.1 Thermal Shock Test
 - 5.2 Salt mist test

APPENDIXES


Measurement Method of Burner Tests

1.APPLICATION

This technical specifications of an o₂ sensors which is a 3/4 wire zirconium dioxide (zro₂) heated oxygen sensor for engine management system use.

Application sensor type is as following

- Element
- 4 ohm-heater 9W
- 6-hole protection tube

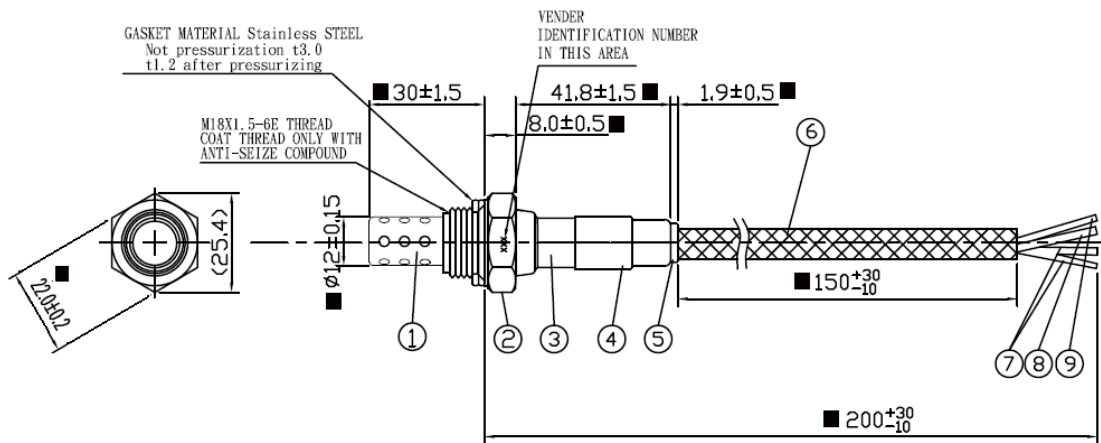


2014.07.28	2014.12.19	3	張明賢	蔡昌利	蔡昌利	MOBILETRON
Date of first edition	Date of revised edition	Edition	Manu-script	Review	Approval	Dec.24.2014
						Release

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	---------------------------------	-----	------------

2. TECHNICAL DATA

ITEM	CONDITION
Storage temperature	-40 °C to +100 °C
Exhaust temperature	$\leq 900^{\circ}\text{C}$ $\leq 950^{\circ}\text{C}$ max 50hrs
Min exhaust temperature	$\geq 250^{\circ}\text{C}$
Hexagon temperature of the sensor housing	$\leq 500^{\circ}\text{C}$
Cable grommet temperature (PTFE formed house) Sensor side cable side	$\leq 250^{\circ}\text{C}$ $\leq 300^{\circ}\text{C}$ Max.4hrs $\leq 200^{\circ}\text{C}$
Cable and protective sleeve temperature	$\leq 250^{\circ}\text{C}$

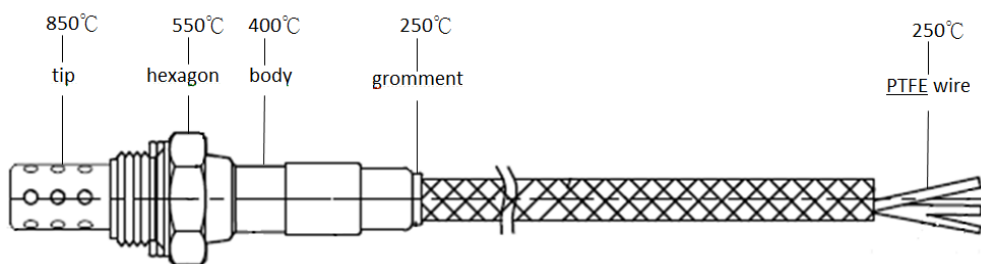

3.FUNCTIONAL TESTS

3.1 Burner tests

The sensor shall be measured properly on a Argon burner exhaust gas test fixture at the condition of 375 °C .

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
-------------	--	------------	-------------------

Requirements:

Electrical Property Burner 375 °C	Lower Toler limit	Upper Toler limit
a) New sensor		
Rich Voltage	750mv	---
R-to-L Response	---	350ms
Lean Voltage	---	100mv
L-to-R Response	---	250ms
Internal Resistance	---	5K Ω
Heater Static Current	0.5A	1.0A
b) After Aged (Life Cycle/High Temperature)		
Rich Voltage	680mv	---
R-to-L Response	---	400ms
Lean Voltage	---	150mv
L-to-R Response	---	300ms
Internal Resistance	---	15K Ω
Heater Static Current	0.5A	1.0A

4. MECHANICAL TEST

4.1 Vibration Test

- Vibration stress ($<1300\text{m/s}^2$)
- By engine vibration ($<5\text{kHz}$)
- By pulsation of the exhaust gas ($<\pm 300\text{ mbar}$)
- By ambient wind (cable, $<10\text{Hz}$)

4.2 Thread Torque Test

- Mount the sensor in a steel test fixture with $\text{M18} \times 1.5 \times 6\text{e}$ threads.
- Tighten to $50 \pm 2\text{Nm}$ with the torque applied the Hex.
- Take off the sensor from the test fixture.


NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	---------------------------------	-----	------------

4.3 Wire Pull Test

- The mounted sensor has to withstand an axial force of $>70\text{N}$ when assembled.
- Handling (shock load up to 1000g).

4.4 Leakage Test-Element and Seal sensor

- Mount the zero leak plug in a pressure chamber with leak tester.
- Set the leak tester pressure to $392 \pm 40\text{kPa}$ ($4.0 \pm 0.4\text{kgf/cm}^2$)
- Measure the blank value of leak tester. Blank value should be measured for every measurement times.
- Take off the zero leak plug from the chamber.
- Mount the sensor in pressure chamber.
- Measure the leak volume.
- Test shall be conducted at room temperature ($25 \pm 5^\circ\text{C}$).
- The leakage rate must be smaller than 0.2ml/min .

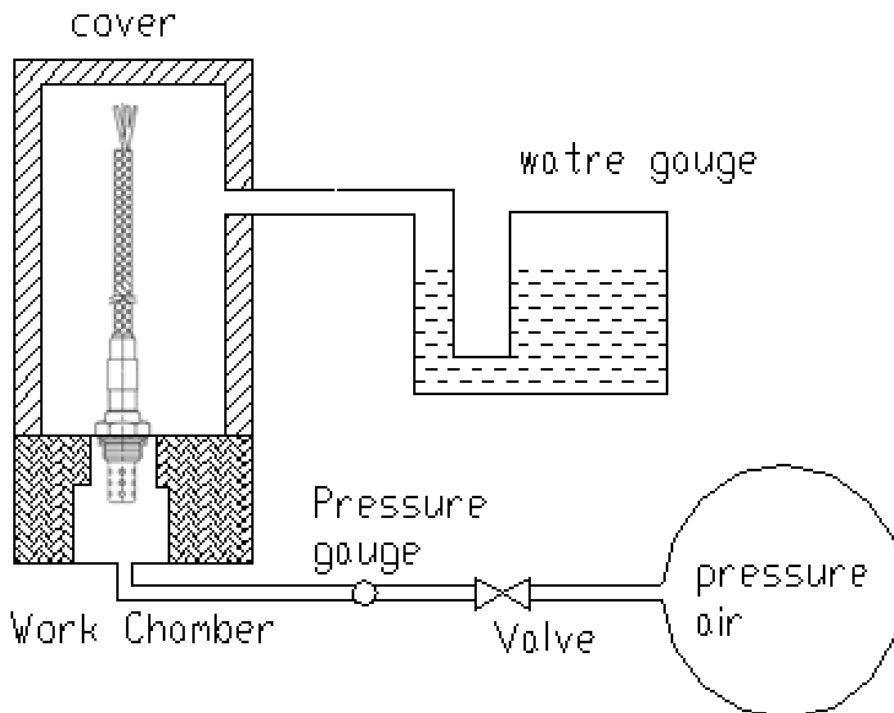

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	--	-----	-------------------

5.ENVIRONMENTAL TEST

5.1 Thermal Shock Test

The sensor shall be exposed to temperature cycle as in figure below.

- Heater is powered up by supplying $12 \pm 0.2V$ DC power throughout the test.
- Repeat the test cycle 4 times.

5.2 Salt mist test

- Heater off
- Testing time: 2 days
- The sensor heating is switched on 5 minutes before and during testing. In order to prevent water from reaching the sensor ceramic a stainless steel sleeve is screwed onto the sensor thread for proper sealing.
- Test condition


- Temperature : $35-50^{\circ}C$
- Salt concentration : $5 \pm 0.5\%wt$
- Spray quantity : $1.5 \pm 0.5cc/hr$
- PH : 6.7 ± 0.5

6.ENGINE DURABILITY TEST

6.1 On Car Test

- Install sensors in exhaust system of the engine which runs as the cycle defined in following figure for 20000Km.
- Each sensor is connected to circuit specified in following figure.
- Supply $12 \pm 0.2V$ DC to heater terminal for the test.

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	---------------------------------	-----	------------

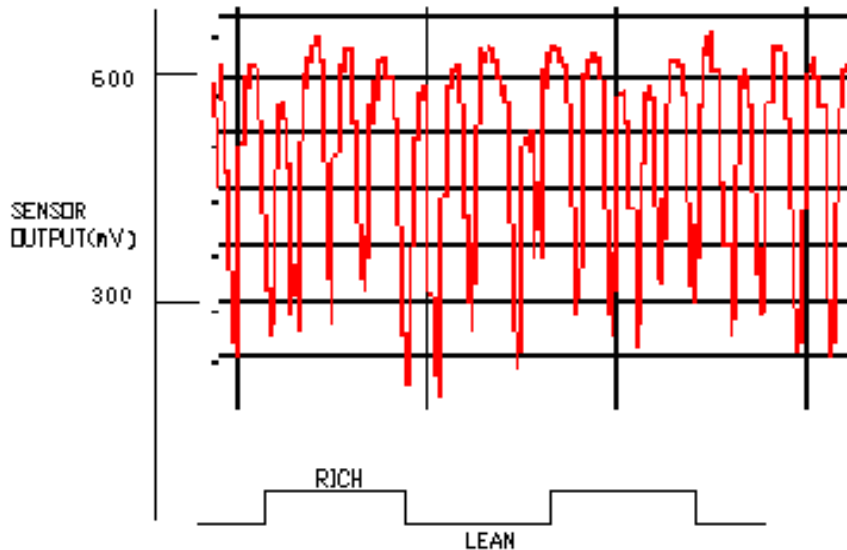

Measurement Method of Burner Tests - (350°C measurement)

1. The sensor shall be tested on a propane burner test fixture. The test fixture shall be adjusted to operate the sensor with the EGO sensor tip temperature of $350 \pm 10^\circ\text{C}$.
2. Supply $12 \pm 0.2\text{V}$ DC to the heater terminals of the sensor with the DC power supply.
3. Measure each sensor output voltage under lean and rich A/F condition with $1\text{M}\Omega$ input impedance recorder.

A/F conditions:

Lean : $\lambda = 1.1 \pm 0.02$

Rich : $\lambda = 0.9 \pm 0.02$

4. Measure the sensor output voltage at rich condition with $10\text{k}\Omega$ external shunt resistance. Sensor internal resistance is calculated by following equation. When internal resistance is measured, tip temperature shall be around 700°C .


$$R_{in} = (V_r - V_2) / (V_2 / 9.9 - V_r / 1000) \quad (\text{k}\Omega)$$

Where V_r : rich voltage, input impedance = $1\text{M}\Omega$

V_2 : rich voltage, external shunt resistance = $10\text{k}\Omega$

5. Record sensor output voltages with a digital voltage counter at the switching between rich level and lean level with the intervals of one second. Measure lean to rich to lean response time between 300mV and 600mV output level.

NAME	OS-08P Electrical Specification	NO.	OS-1-1-012
------	---------------------------------	-----	------------

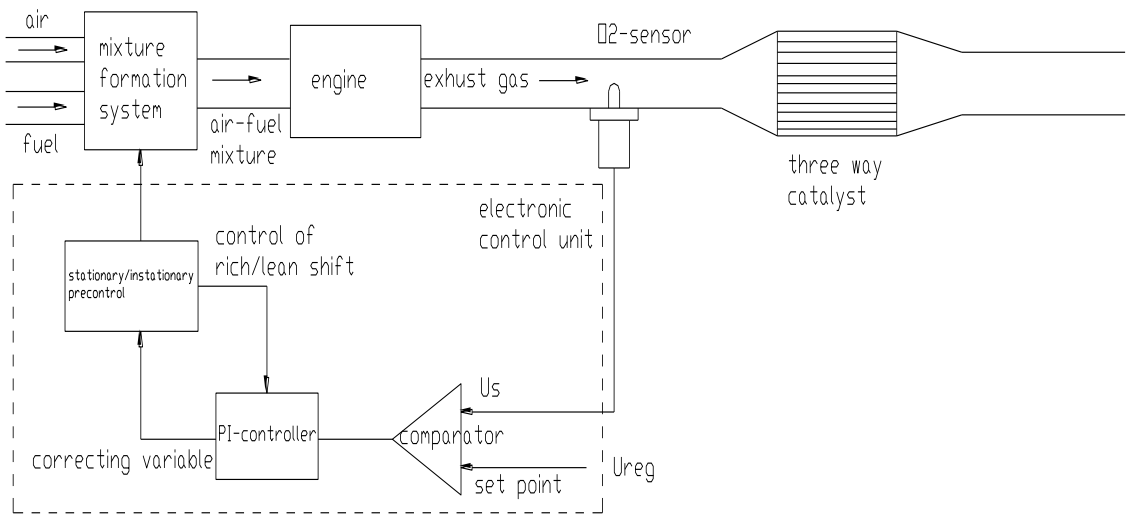

Respond time

